

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
29 November 2001 (29.11.2001)

PCT

(10) International Publication Number  
**WO 01/91233 A1**

(51) International Patent Classification<sup>7</sup>:  
1/38, 5/00, 1/24

**H01Q 9/04,**

(74) Agent: **HOFMAN-BANG ZACCO A/S;** Hans  
Bekkevolds Allé 7, DK-2900 Hellerup (DK).

(21) International Application Number: **PCT/EP01/05618**

(22) International Filing Date: **16 May 2001 (16.05.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
PA 2000 00820 23 May 2000 (23.05.2000) DK  
00610112.5 1 November 2000 (01.11.2000) EP  
60/246,749 9 November 2000 (09.11.2000) US

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON (publ)**  
[SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **YING, Zhinong** [CN/SE]; Skyttelinjen 50, S-226 49 Lund (SE).  
**DAHLSTRÖM, Anders** [SE/SE]; Östergatan 2, S-235 33 Vellinge (SE).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: **MULTI FREQUENCY-BAND ANTENNA**

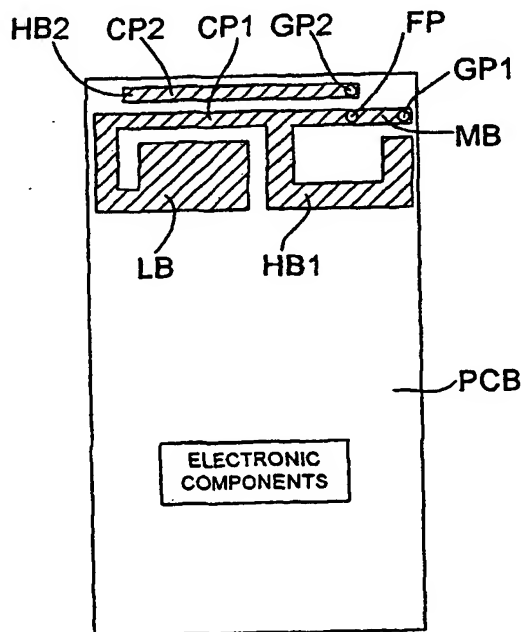

(57) Abstract: A multi frequency band antenna with a low band portion (LB) tuned to a low frequency band, and a first high band portion (HB1) tuned to a first high frequency band at higher frequencies than the low frequency band. The low band portion (LB) and the first high band portion (HB1) have a common first grounding point (GP1), a common feeding point (FP) for feeding input signals to the antenna and for outputting signals from the antenna, and a first conductor portion (CP1), which forms part of the low band portion (LB) and of the first high band portion (HB1). The first conductor portion (CP1) is electrically connected to the first grounding point (GP1) and to the common feeding point (FP). A second high band portion (HB2) is coupled to the first conductor portion (CP1) and tuned to a second high frequency band at a higher frequency than the low frequency band and different from the first high frequency band. The antenna can be tuned to eg the frequencies 900 MHz, 1800 Mhz and 1900 MHz currently used for mobile telephones.

WO 01/91233 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## Multi frequency-band antenna

### Field of the invention

The invention relates to antennas for use in portable  
5 communications devices such as mobile telephones.  
Portable communications devices are required to be  
compact in size, which is a requirement that applies to  
every component of the devices, including the antenna.  
Modern mobile telephones use two or more distinct  
10 frequency bands, and preferably one and the same antenna  
is required to operate in all frequency bands used by the  
telephone.

### Related prior art

15 Currently, most mobile telephones use one or more of the  
following three frequency bands: the GSM band centred on  
the frequency 900 MHz, the DSC band centred on 1800 MHz,  
and the PCS band centred on 1900 MHz. The 900 MHz and  
1800 MHz frequency bands are separated by one octave,  
20 whereas the 1800 MHz and 1900 MHz frequency bands are  
separated by only a fraction of one octave. In many  
mobile telephones using the 900 MHz and 1800 MHz  
frequency bands the antenna has separate portions tuned  
to respective ones of the two frequency bands, since it  
25 is not considered feasible to have one and the same  
portion of the antenna tuned to a frequency band of more  
than one octave with a relatively large unused frequency  
band between the useful frequency bands.

30 On the other hand, the two US patent applications serial  
numbers 09/112152 and 09/212259 describe attempts having  
been made to have one and the same portion of the antenna

CONFIRMATION COPY

cover both high frequency bands centred on 1800 MHz and 1900 MHz with a lower frequency limit of 1710 MHz and an upper frequency limit of 1990 MHz - a bandwidth of 280 MHz. The improvement in bandwidth is obtained at the expense of antenna gain.

It is the object of the invention to provide an antenna, which is usable in at least three frequency bands and which has a minimum loss, ie maximum gain in all frequency bands.

### Summary of the invention

The invention provides an antenna for use in eg portable communications devices such as mobile telephones. The antenna is useful in a low frequency band and two high frequency bands, where the two high frequency bands are relatively closer to each other than to the low frequency band. The antenna is thus effectively a triple band antenna, and a mobile telephone having such an antenna is thus useful in three frequency bands such as the above identified three frequency bands centred on 900 MHz, 1800 MHz and 1900 MHz respectively. However, the invention is not restricted to the use in the above-identified frequency bands, but will be suitable for use in existing and future frequency bands as well.

### Brief description of the drawings

Figure 1 schematically shows a known dual band antenna electrically connected to a printed circuit board,

Figure 2 schematically shows a preferred embodiment of a triple band antenna of the invention electrically connected to a printed circuit board,

- 5 Figure 3 is an end view of the antenna and printed circuit board of figure 2,

Figure 4 schematically shows the printed circuit board with the antenna in figure 2, and

10

Figure 5 is a diagram showing a typical return loss for an antenna according to the invention.

#### Detailed description of the invention

- 15 In figures 2-4, a printed circuit board PCB with an antenna according to the invention for use in a mobile telephone is shown. In the shown embodiment, for illustrative purposes, the printed circuit board has a rectangular shape, and the invention is not restricted to
- 20 the use of a rectangular shape. In practical use the printed circuit board will have a number of electronic components mounted thereon, which are necessary for the operation of the mobile telephone, but which are not part of the invention. In figure 4 such components are
- 25 therefore indicated only schematically.

In figures 2-4 an electrically conductive material, such as copper, constitutes the antenna of the invention. The antenna is preferably spaced from the printed circuit

30 board PCB with a predetermined distance therebetween. A first conductor portion CP1, which is rectilinear in this embodiment, has a grounding point with a first grounding

post GP1 at a first end of the first conductor portion CP1. In use the grounding point will be electrically connected through the first grounding post GP1 to ground potential at the printed circuit board PCB. Near the first end and at a predefined distance therefrom, the first conductor portion CP1 has a feeding point with a feeding post FP electrically connecting the first conductor portion CP1 to an electronic circuit on the PCB for feeding the antenna with signals to be transmitted by the antenna, and/or to electronic circuitry for receiving signals received by the antenna. The portion of the first conductor portion CP1 situated between the feeding post FP and the first grounding post GP1 functions as a matching bridge MB.

15

At a second end, opposite the first end, a low band portion LB branches off at one side of the straight first conductor portion CP1 and forms a spiral. Here, three rectilinear segments forming right angles with each other constitute the low band spiral. The innermost segment in the spiral is wider than the remaining three rectilinear segments including the conductor portion CP1.

Between the first and second ends a first high band portion HB1, also forming a spiral, branches off at a right angle and at the same side as the low band portion LB. The first high band spiral is also constituted by three rectilinear segments forming right angles with each other. The segments constituting the first high band spiral have substantially equal widths.

30

The low band portion LB of the antenna is tuned to have a relatively low resonance frequency, such as 900 MHz, and a predefined bandwidth to define a low frequency band of the antenna. The low resonance frequency is mainly  
5 determined or influenced by the length of the low band portion LB measured from the feeding point FP to the inner end of the spiral, which length corresponds to one quarter of a wavelength at the low resonance frequency. When an electrical signal with frequencies in the low  
10 frequency band is fed to the feeding point FP of the antenna, corresponding electromagnetic signals will be radiated from the low band portion LB of the antenna as radio waves; and, vice versa, when the antenna receives electromagnetic signals in the form of radio waves with  
15 frequencies in the low frequency band, electrical signals will be generated by the low band portion LB of the antenna, and the thus generated electrical signals are sensed at the feeding post FP by receiving electronic circuitry connected to the antenna.

20

The first high band portion HB1 of the antenna is tuned to have a first high resonance frequency, such as 1800 MHz, and predefined bandwidth to define a first high frequency band. The first high resonance frequency is  
25 mainly determined or influenced by the length of the first high band portion HB1 measured from the feeding point FP to the inner end of the spiral, which length corresponds to one quarter of a wavelength at the first high resonance frequency. When an electrical signal with  
30 frequencies in the first high frequency band is fed to the feeding point FP of the antenna, corresponding electromagnetic signals will be radiated from the first

- high band portion HB1 of the antenna as radio waves, and, vice versa, when the antenna receives electromagnetic signals in the form of radio waves with frequencies in the first high frequency band, electrical signals will be
- 5 generated by the first high band portion HB1 of the antenna, and the thus generated electrical signals are also sensed at the feeding point FP by receiving electronic circuitry connected to the antenna.
- 10 Together, the low band portion LB and the first high band portion HB1 of the antenna form a dual band antenna which is usable in mobile telephones operating in two frequency bands such as 900 MHz and 1800 MHz.
- 15 So far the antenna of the invention corresponds to the known antenna shown in figure 1.

- In accordance with the invention the antenna also has a second high band portion HB2 in the form of a second
- 20 conductor portion CP2 arranged in a parallel relationship to the first conductor portion CP1 and at a predetermined distance therefrom. At a first end the second high band portion HB2 has a grounding point electrically connected through a second grounding post GP2 to ground potential
- 25 on the PCB. The second grounding post GP2 is arranged in close vicinity of the feeding post FP, preferably at a distance of 0.5 mm, or at least in the range between 0.1 mm and 1.0 mm.
- 30 Together the first conductor portion CP1 and the second conductor portion CP2 form an electrical capacitor. A capacitive or parasitic coupling therefore exists between



the first conductor portion CP1 and the second conductor portion CP2. The second high band portion HB2 of the antenna is tuned to have a second high resonance frequency, such as 1900 MHz, and predefined bandwidth to  
5 define a second high frequency band. The second high resonance frequency is mainly determined or influenced by the length of the second conductor portion CP2, which corresponds to one quarter of a wavelength at the second high frequency, and the capacitive coupling between the  
10 first conductor portion CP1 and the second conductor portion CP2.

In the alternative, the first high band portion HB1 of the antenna can be tuned to the higher one of the two  
15 high band resonance frequencies - here 1900 MHz, and the second high band portion HB2 of the antenna can be tuned to the lower one of the two high band resonance frequencies - here 1800 MHz.

20 When an electrical signal with frequencies in the second high frequency band is fed to the feeding post FP of the antenna, these signals will be coupled to the second conductor portion CP2, due to the tuning of the capacitive or parasitic coupling existing between the  
25 first conductor portion CP1 and the second conductor portion CP2, and corresponding electromagnetic signals will be radiated from the second high band portion HB2 of the antenna as radio waves. When the antenna receives electromagnetic signals in the form of radio waves with  
30 frequencies in the second high frequency band, electrical signals will, vice versa, be generated by the second high band portion HB2 of the antenna, and these signals will

be coupled to the first conductor portion CP1, and the thus generated electrical signals are also sensed at the feeding post FP by receiving electronic circuitry connected to the antenna.

5

The first high band portion HB1 of the antenna is arranged on one side of the first linear conductor portion CP1, and the second high band portion HB2 of the antenna is arranged on the opposite side of first linear conductor portion CP1. Hereby interference between the two high frequency bands is reduced to a minimum.

10

In figure 3 it is seen most clearly that the active portions of the antenna (including the linear conductor portions CP1 and CP2, the low and high band portions LB, HB1 and HB2) are spaced from the printed circuit board PCB. In the space between the active portions of the antenna and the PCB there is a dielectric substrate DE with physical dimensions and specific dielectric properties selected for the proper functioning of the antenna. The thickness of the dielectric substrate DE is not necessarily the same as the distance separating the active portions of the antenna from the printed circuit board PCB.

15

20

25

When used in a mobile telephone, the active portions of the antenna may be placed close to the inner side of a housing wall of the telephone or even fixed or secured thereto, eg by gluing. In such case the dielectric properties of the housing material and their influence on the functioning of the antenna should be taken into account.

30

In figure 5 is shown a typical return loss for a multi frequency band antenna according to the invention. The return loss is here expressed as the voltage standing wave ratio (VSWR) of the antenna drawn on a linear frequency scale from 500 MHz to 2.5 GHz. The return loss has one distinct minimum at a low frequency band and two minima at two high frequency bands HF1 and HF2 relatively close to each other.

10

**Claims**

1. A multi frequency band antenna comprising
- a low band portion (LB) tuned to a low frequency band (LF); and
  - 5 - a first high band portion (HB1) tuned to a first high frequency band (HF1; HF2) at higher frequencies than the low frequency band (LF),
- where the low band portion (LB) and the first high band portion (HB1) have
- 10 - a common first grounding point (GP1),
  - a common feeding point (FP) for feeding input signals to the antenna and for outputting signals from the antenna, and
  - a first conductor portion (CP1) forming part of the low
  - 15 band portion (LB) and of the first high band portion (HB1), the first conductor portion (CP1) being electrically connected to the first grounding point (GP1) and to the common feeding point (FP),
- 20 c h a r a c t e r i z e d in that a second high band portion (HB2) is coupled to the first conductor portion (CP1) and tuned to a second high frequency band (HF2; HF1) at a higher frequency than the low frequency band (LF) and different from the first high frequency band
- 25 (HF1; HF2).
2. An antenna according to claim 1, c h a r a c t e r - i z e d in that the second high band portion (HB2) includes a second conductor portion (CP2) capacitively
- 30 coupled to the first conductor portion (CP1).

3. An antenna according to claims 1-2, c h a r a c -  
t e r i z e d in that the first conductor portion (CP1)  
and the second conductor portion (CP2) each include  
substantially linear portions.

5

4. An antenna according to claim 3, c h a r a c t e r -  
i z e d in that the second conductor portion (CP2) is  
arranged substantially parallel to the first conductor  
portion (CP1).

10

5. An antenna according to claim 4, c h a r a c t e r -  
i z e d in that the second conductor portion (CP2) is  
arranged substantially parallel to the first conductor  
portion (CP1) over a length corresponding to one quarter  
15 of a wavelength of a frequency in the second high  
frequency band (HF2; HF1).

6. An antenna according to claim 1, c h a r a c t e r -  
i z e d in that each of the low band portion (LB) and  
20 the first high band portion (HB1) is configured  
substantially in a spiral form and each branches off from  
the substantially linear first conductor portion (CP1) at  
a first side of the first conductor portion (CP1).

25 7. An antenna according to claim 6 c h a r a c t e r -  
i z e d in that the second high band portion (HB2) is  
arranged at a second side opposite the first side of the  
first conductor portion (CP1).

30 8. An antenna according to claim 6, c h a r a c t e r -  
i z e d in that each of the low band portion (LB) and

the first high band portion (HB1) spirals includes substantially linear portions of conductive material.

9. An antenna according to claim 8, characterized in that the substantially linear portions of conductive material are arranged in pairs forming substantially right angles.

10. An antenna according to any one of the claims 1-9, characterized in that a carrier (DE) with predetermined dielectric properties supports the antenna.

11. An antenna according to any one of the claims 1-10, characterized in that the second high band portion (HB2) has a second grounding point (GP2) arranged in close vicinity of the feeding point (FP) of the antenna.

12. An antenna according to claim 11, characterized in that the grounding point (GP2) of the second high band portion (HB2) is arranged at a distance between 0.1 mm and 1.0 mm from the feeding point (FP) of the antenna.

13. An antenna according to claim 11, characterized in that the grounding point (GP2) of the second high band portion (HB2) is arranged at substantially 0.5 mm distance from the feeding point (FP) of the antenna.

14. A mobile communications unit having an antenna according to any one of the preceding claims.

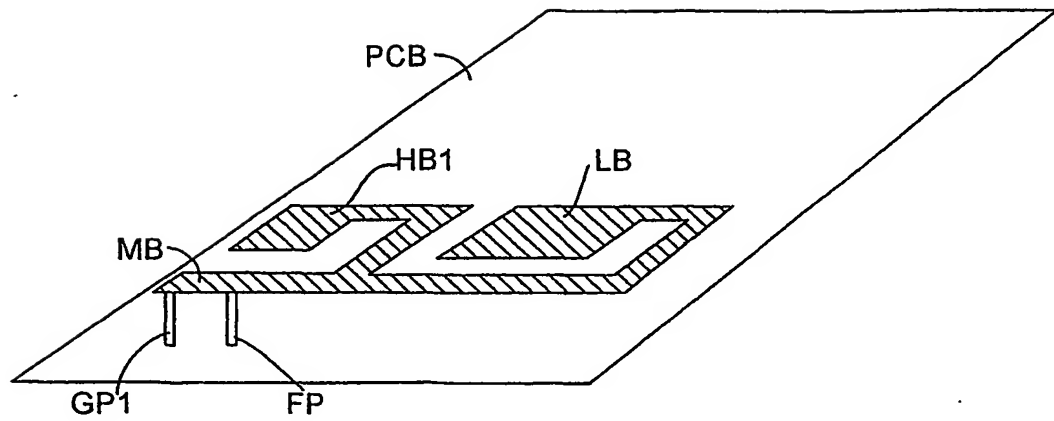


Fig. 1 - prior art

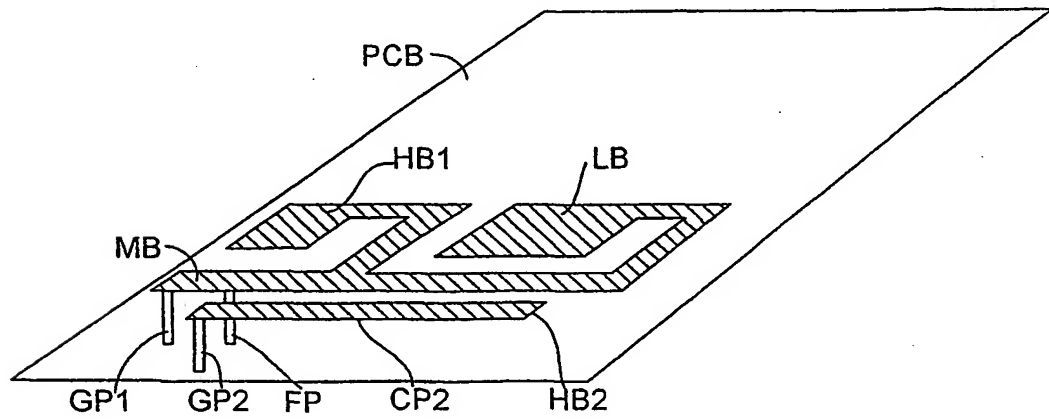


Fig. 2

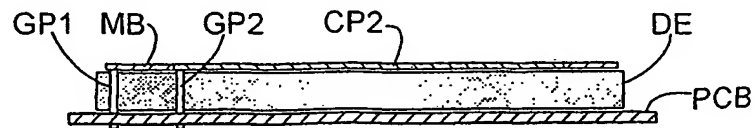


Fig. 3

2/2

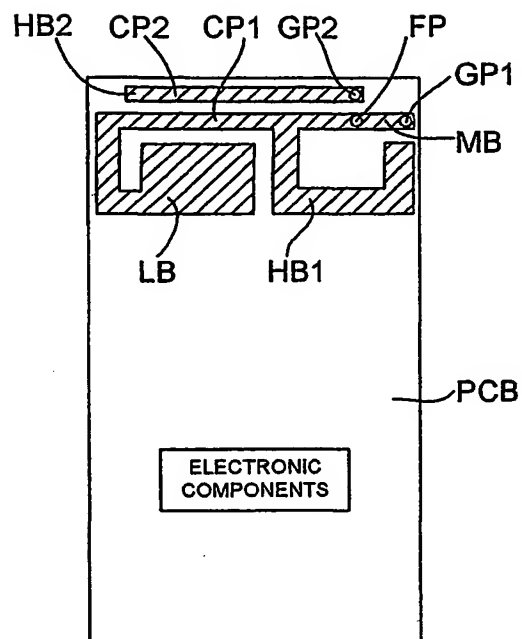


Fig. 4

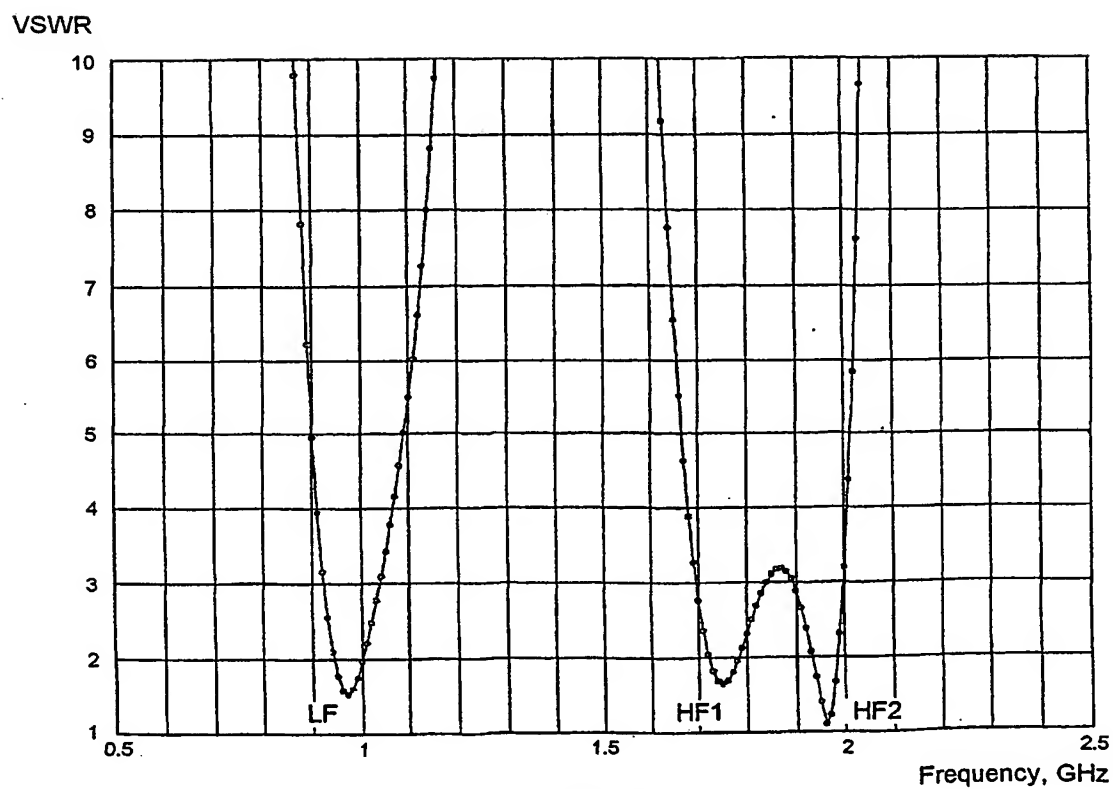


Fig. 5

SUBSTITUTE SHEET (RULE 26)



International Application No  
PCT/EP 01/05618

A. CLASSIFICATION OF SUBJECT MATTER				
IPC 7	H0109/04	H0101/38	H0105/00	H0101/24

According to International Patent Classification (IPC) or to both national classification and IPC

#### B. FIELDS SEARCHED

**Minimum documentation searched (classification system followed by classification symbols)**

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>WO 00 03452 A (ERICSSON)  20 January 2000 (2000-01-20)  cited in the application  abstract  page 3, line 20 - line 27  page 6, line 11 -page 10, line 10; figures  2,3,6,7</p>	<p>1-4,  6-10,14</p>
Y	<p>EP 0 942 488 A (MURATA)  15 September 1999 (1999-09-15)  column 1, line 30 -column 2, line 18  column 4, line 8 -column 5, line 20;  figures 1-4,7</p>	<p>1-4,  6-10,14</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date of priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "A" document member of the same patent family

Date of the actual completion of the international search

4 October 2001

Date of mailing of the international search report

12/10/2001

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

## Angrabeit, F

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/05618

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 332 139 A (TOYODA CHUO KENKYUSHO KK) 13 September 1989 (1989-09-13) column 1, line 14 -column 2, line 36 column 2, line 41 -column 4, line 38; figures 1,4-10,13,15	1-4, 6-10,14
P,A	WO 00 36700 A (ERICSSON) 22 June 2000 (2000-06-22) cited in the application abstract; figures 4,7,8	1-14

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/05618

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0003452	A	20-01-2000	US 6166694 A AU 5075999 A CN 1315064 T EP 1095422 A1 WO 0003452 A1	26-12-2000 01-02-2000 26-09-2001 02-05-2001 20-01-2000
EP 0942488	A	15-09-1999	JP 11312923 A EP 0942488 A2 US 6147650 A	09-11-1999 15-09-1999 14-11-2000
EP 0332139	A	13-09-1989	JP 1231404 A JP 1942242 C JP 6059009 B CA 1313408 A1 DE 68909072 D1 DE 68909072 T2 EP 0332139 A2 US 4907006 A	14-09-1989 23-06-1995 03-08-1994 02-02-1993 21-10-1993 24-03-1994 13-09-1989 06-03-1990
WO 0036700	A	22-06-2000	AU 3092500 A WO 0036700 A1	03-07-2000 22-06-2000

Form PCT/ISA/210 (patent family annex) (July 1992)